


# KA01

ILLUSTRATED ASSEMBLY MANUAL HKA01IP'1

## RGB Shield for Arduino®



velleman®  
projects

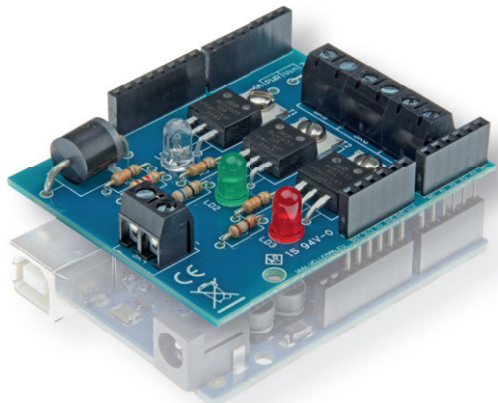

**Control 3 dimmer channels (1 x RGB or 3 single channels) with Arduino UNO™.**

### Features

- For use with Arduino Due™, Arduino Uno™, Arduino Mega™
- RGB indicator leds
- Screw terminals for led strip connection.
- With cascade connectors for other shields
- Selectable power supply: external power or power from Arduino Uno™ board

### Specifications

- Max. current: 2A/channel
- Max. input voltage: 50VDC
- Dimensions: 68 x 53mm / 2.67 x 2.08"



Search product

Search Product

Navigation

- Home page
- products
- Sales outlets
- Support
- Publications
- Jobs
- About us

News

NEW MK193 LED CUBE

CubeAnimator software  
available for download  
here!!!

Posted on 04-06-12

[Read more...](#)

## Velleman Projects Newsletter

Are you an electronics enthusiast or simply interested in our kits, mini-kits, modules and instruments?

Subscribe to our Newsletter and receive every month the latest news, new products & updates on Velleman Projects.

You will receive an e-mail. Click on the link in that e-mail to confirm your subscription.

Email:



Do you want to unsubscribe? Click on the 'unsubscribe' link in the footer of the last received newsletter from Velleman Projects.

- velleman.eu
- happower.eu
- panel.eu
- vellemanprojects.com
- en - english - instruments
- velbus.eu
- forum.velleman.eu

Advertisements

- DA1
- DA2
- A1
- KB55(N) / VM110(N)  
Android Application



Subscribing our newsletter?, visit [www.vellemanprojects.eu](http://www.vellemanprojects.eu)

Login Register

FR EN Search

It is currently: Fri May 14, 2010 4:00 pm

View unanswered posts | View active topics

Board index

All times are UTC

Category	Topic	Topics	Posts	Last visit
General	<p><b>Forum rules - Regulates Actions</b> Read first - A link to premier file Moderation: Velleman Support</p> <p><b>Forum Administration</b> Velleman In-house Forum Structure Moderation: Velleman Support</p>	2	2	Tue Dec 01, 2010 10:44 am <a href="#">View forum</a>
VelBus	<p><b>Velbus Home Automation</b> Special section for our new Velbus Home Automation System (Domoticz) Moderation: Velleman Support</p>	404	2072	Tue Dec 11, 2012 0:13 pm <a href="#">View forum</a>
Kits (Working projects - Projects & modules)	<p><b>General</b> For other topics, general tips and tricks, non-ideas Moderation: Velleman Support</p> <p><b>Apple Hi-Fi Projects</b> All audio related projects, amplifiers, valve amplifiers Moderation: Velleman Support</p> <p><b>PC Related Projects</b> For projects that are connected to the PC via interface cards Moderation: Velleman Support</p> <p><b>Microcontroller Programming - Superlearning Projects</b> Here you can discuss PIC programming, Assembly, etc. Moderation: Velleman Support</p> <p><b>Remote and Cloud</b> All about our home related projects from remote checks to programmable timers Moderation: Velleman Support</p> <p><b>Home Projects</b> Household related projects, from light drivers to remote control Moderation: Velleman Support</p>	131	430	Wed Sep 09, 2012 1:37 pm <a href="#">View forum</a>
		563	2463	Fri May 14, 2010 6:32 pm <a href="#">View forum</a>
		1438	4568	Thu May 19, 2010 0:08 pm <a href="#">View forum</a>
		467	1768	Thu May 11, 2012 0:37 pm <a href="#">View forum</a>
		201	806	Fri May 07, 2010 6:40 pm <a href="#">View forum</a>
		636	2389	Fri May 14, 2010 12:02 pm <a href="#">View forum</a>



Participate our Velleman Projects Forum



**Velleman N.V.**

**Legen Heirweg 33**

**9890 Gavere**

**(België)**

## assembly hints

### 1. Assembly (Skipping this can lead to troubles !)

Ok, so we have your attention. These hints will help you to make this project successful. Read them carefully.



#### 1.1 Make sure you have the right tools:

- A good quality soldering iron (25-40W) with a small tip.
- Wipe it often on a wet sponge or cloth, to keep it clean; then apply solder to the tip, to give it a wet look. This is called 'thinning' and will protect the tip, and enables you to make good connections. When solder rolls off the tip, it needs cleaning.
- Thin raisin-core solder. Do not use any flux or grease.
- A diagonal cutter to trim excess wires. To avoid injury when cutting excess leads, hold the lead so they cannot fly towards the eyes.
- Needle nose pliers, for bending leads, or to hold components in place.
- Small blade and Phillips screwdrivers. A basic range is fine.



☞ For some projects, a basic multi-meter is required, or might be handy




#### 1.2 Assembly Hints :

- Make sure the skill level matches your experience, to avoid disappointments.
- Follow the instructions carefully. Read and understand the entire step before you perform each operation.
- Perform the assembly in the correct order as stated in this manual
- Position all parts on the PCB (Printed Circuit Board) as shown on the drawings.
- Values on the circuit diagram are subject to changes, the values in this assembly guide are correct\*
- Use the check-boxes to mark your progress.
- Please read the included information on safety and customer service

\* Typographical inaccuracies excluded. Always look for possible last minute manual updates, indicated as 'NOTE' on a separate leaflet.

#### 1.3 Soldering Hints :

1. Mount the component against the PCB surface and carefully solder the leads




2. Make sure the solder joints are cone-shaped and shiny




3. Trim excess leads as close as possible to the solder joint



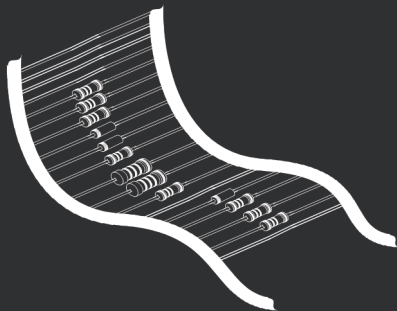


REMOVE THEM FROM THE TAPE ONE AT A TIME !

Included in  
this kit



## 2. RESISTOR



COLOUR	COLOUR NAME	1ST DIGIT/ STRIPE	2ND DIGIT/ STRIPE	3RD DIGIT/ STRIPE	MULTIPLIER STRIPE	TOLE 4TH!
Black	BLACK	0	0	0	x1	1%
Brown	BROWN	1	1	1	x10	
Red	RED	2	2	2	x100	
Orange	ORANGE	3	3	3	x1.000	
Yellow	YELLOW	4	4	4	x10.000	
Green	GREEN	5	5	5	x100.000	
Blue	BLUE	6	6	6	x1.000.000	

**DO NOT BLINDLY FOLLOW THE ORDER OF THE COMPONENTS ONTO THE TAPE. ALWAYS CHECK THEIR VALUE ON THE PARTS LIST!**

# I CONSTRUCTION

## 1 Jumper

Select power source




- Vin: power from Arduino®

OR


- PWR: Power from external supply

## 2 Resistors




- R1: 1K (1 - 0 - 2 - B)
- R2: 68 (6 - 8 - 0 - B)
- R3: 180 (1 - 8 - 1 - B)
- R4: 330 (3 - 3 - 1 - B)
- R5: 330 (3 - 3 - 1 - B)
- R6: 330 (3 - 3 - 1 - B)


## 3 Transistors




## 4 Female header




## 5 LED's




## 6 Diode




## 7 Terminal blocks




## II CONNECTION DIAGRAM

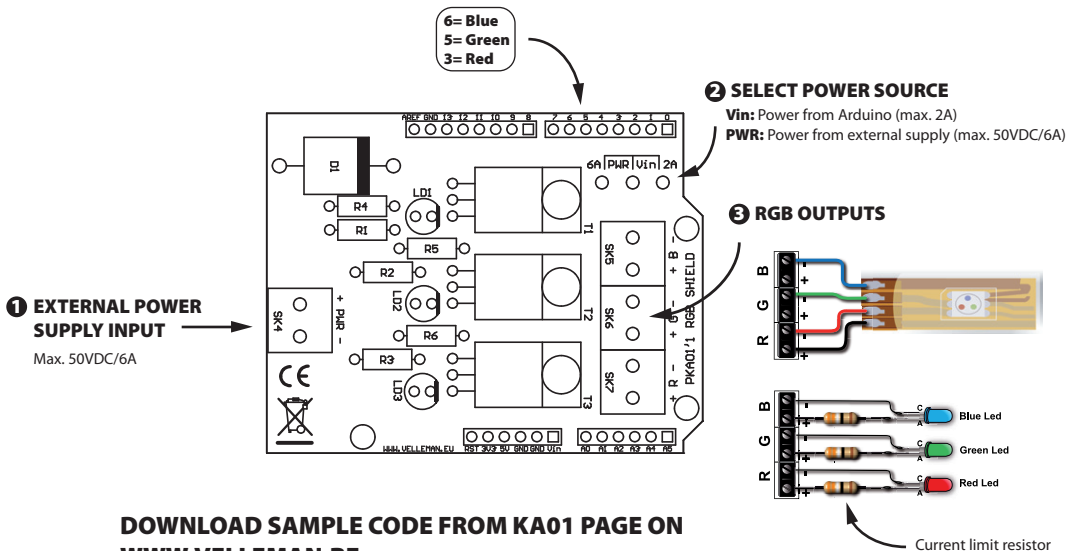


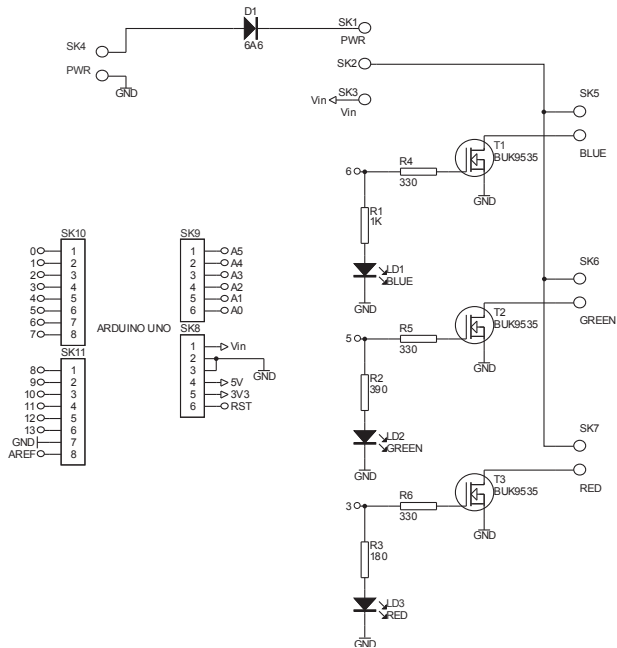




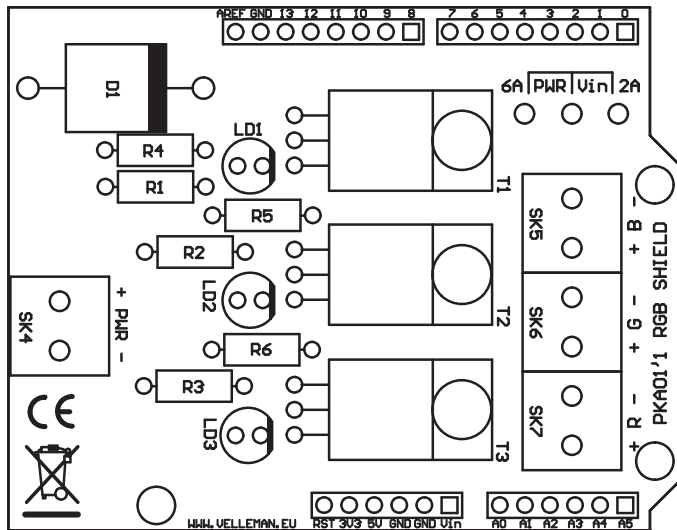


# Leds and how to use them



Leds feature a specific voltage drop, depending on type and colour. Check the datasheet for exact voltage drop and rated current !



Never connect leds in parallel



## How to Calculate the series resistor:

Example: operate a red led (1.7V) on a 9Vdc source.

Required led current for full brightness: 5mA (this can be found in the datasheet of the led)

$$\frac{\text{Supply voltage (V) - led voltage (V)}}{\text{required current (A)}} = \text{series resistance (ohms)}$$



$$\frac{9V - 1.7V}{0.005A} = 1460 \text{ ohm}$$

closest value :  
use a 1k5 resistor

Required resistor power handling=  
voltage over resistor x current passed trough resistor




$$(9V - 1.7V) \times 0.005A = 0.036W$$

a standard 1/4W resistor  
will do the job

## LEDs in series:

Example: 3 x red led (1.7V) on 9V battery

Required led current for full brightness: 5mA  
(this can be found in the datasheet of the led)



$$\frac{\text{Supply voltage (V) - (number of leds x led voltage (V))}}{\text{required current (A)}} = \text{series resistance (ohms)}$$




$$\frac{9V - (3 \times 1.7V)}{0.005A} = 780 \text{ ohm}$$


use an  
820 ohm resistor

## open collector outputs

An open collector output can be compared to a switch which switches to ground when operated



Example: How to switch an LED by means of an open collector output







The new Velleman Projects catalogue is  
now available. Download your copy here:  
[www.vellemanprojects.eu](http://www.vellemanprojects.eu)



Modifications and typographical errors reserved - © Velleman nv. HKA01'IP  
Velleman NV, Legen Heinweg 33 - 9890 Gavere.